

HM9B



- Nickel plated alloy steel IP68 dual shear beam load cell
- High accuracy
- Suitable for truck, track, hopper and other electronic weighing devices
- Current calibrated (sc-option)



OIML test certificate no. D09-06.08
C of C no. R60/2000-CN1-06.06


Available models

Capacity	Accuracy	Full article description
10 t	C3	HM9B-C3-10t-16B
20 t	C3	HM9B-C3-20t-16B
25 t	C3	HM9B-C3-25t-16B(-SC)
30 t	C3	HM9B-C3-30t-16B(-SC)
40t LE	C3	HM9B-C3-40t LE-16B
40t	C3	HM9B-C3-40t-16B
50t	C3	HM9B-C3-50t-16B

Specification

Accuracy class		OIML R60 C3	
Output sensitivity (= FS)	mV/V	2.0 ± 0.002	
Maximum capacity (E _{max})	t	10, 20, 25	30, 40LE, 40, 50
Maximum number of load cell intervals (nLC)		3000	
Ratio of minimum LC verification interval Y = E _{max} / v _{min}		15000	7500
Combined error	%FS	± 0.023	
Minimum dead load	klb	0	
Safe overload	of E _{max}	150 %	
Ultimate overload	of E _{max}	300 %	
Zero balance	%FS	± 1.5	
Excitation, recommended voltage	V	5 ~ 12(DC)	
Excitation maximum	V	18(DC)	
Input resistance	Ω	700 ± 7	
Output resistance	Ω	700 ± 7	
Insulation resistance	MΩ	≥ 5000 (50VDC)	
Compensated temperature	°C	-10 ~ +40	
Operating temperature	°C	-35 ~ +65	
Storage temperature	°C	-40 ~ +70	
Element material		Nickel plated alloy steel	
Ingress protection (according to EN 60529)		IP68	
ATEX classification (optional)		II1G Ex ia IIC T4	II1D Ex iaD 20 T73°C II3G Ex nL IIC T4

Dimensions in mm

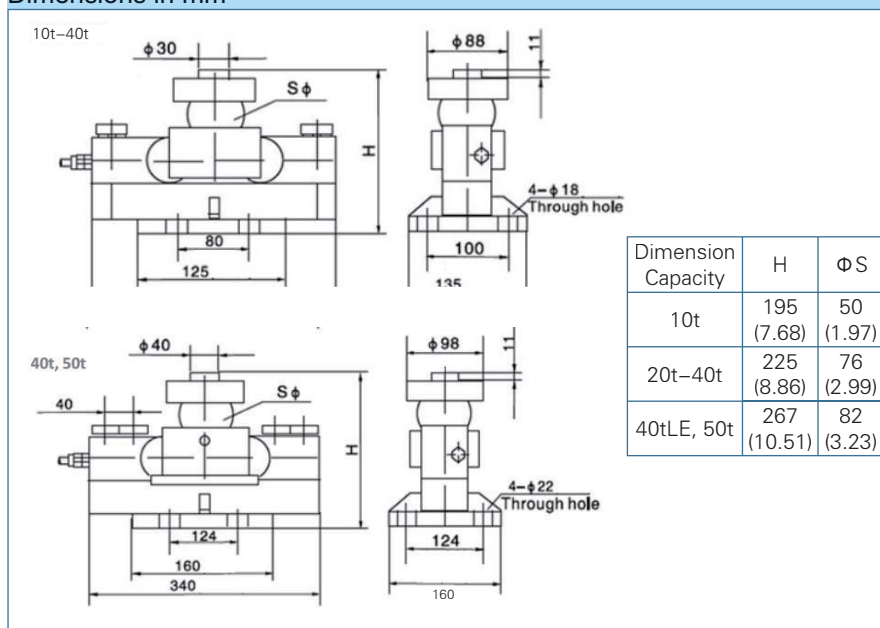

Wiring

